


SANODAL® GREEN 3LW

ALUMINUM DYE

Sanodal® Green 3LW is distinguished by high fastness to light, weather and heat. It is recommended for applications where a light fast green finish is required. When processed according to the Sanodal procedure, this dye is suitable for exterior architectural components.

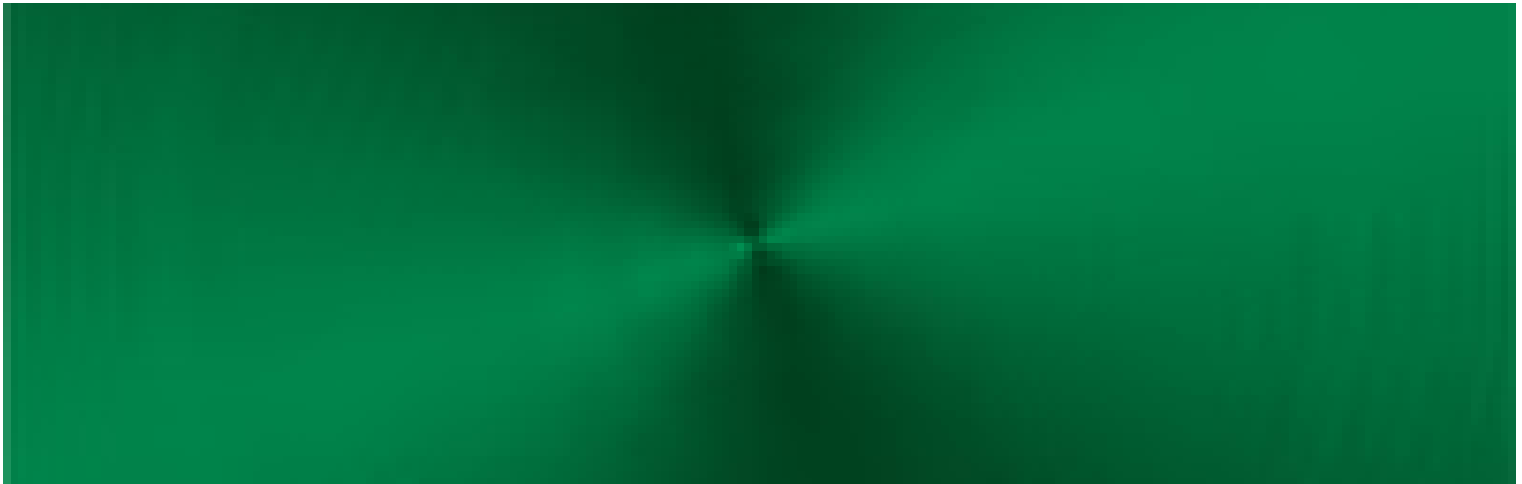

BENEFITS

- Excellent light- and weather fastness properties
- Suitable for outdoor and indoor applications
- Overdyeing by a subsequent electrolytic dyeing process possible
- Designed for many architectural needs

TECHNICAL DATA

Product Data

Delivery Form

Granules

Solubility in water

(20°C/69°F)

100 g/l

Recommended dye bath

pH

5-6

Recommended dye bath

buffer

Sodium Acetate

Light fastness

>9

Single dye

✓

Dye blend

-

Applications

- Outdoor
- Indoor
- Architecture