


## ANODAL MS-2 LIQ

### ALUMINIUM CHEMICAL

Anodal® MS-2 liquid is an improved formulation of our former Anodal MS-1 liq. regarding sealing quality as well as haptic properties. This new nickel-based seal concentrate will provide a smut free, quality seal using mid-temperature conditions. The recommended application temperature range is 75-85°C.

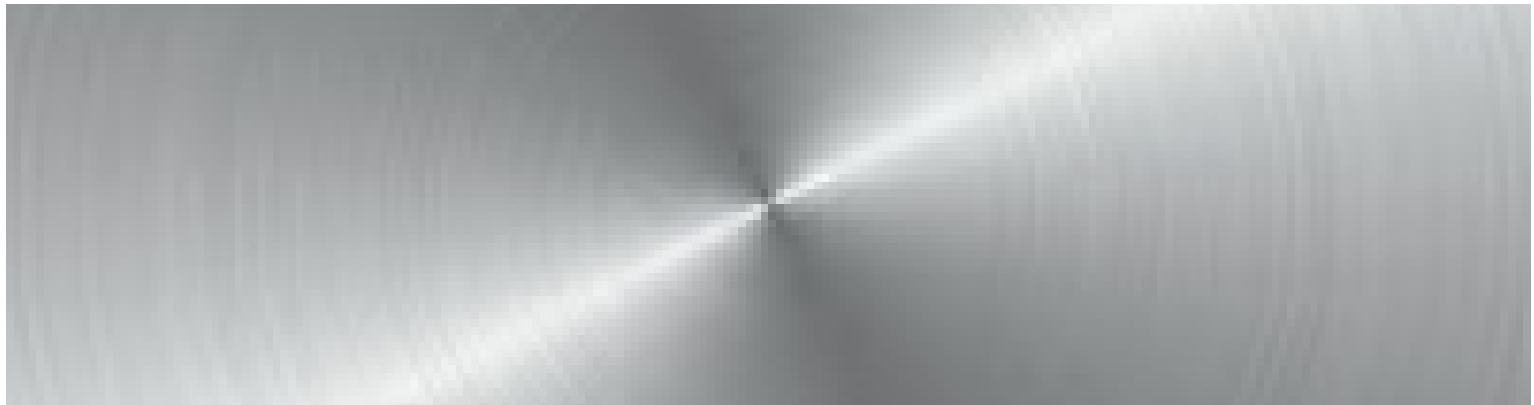

### BENEFITS

- suitable for all types of anodic films as clear, organically dyed, electrolytically or integrally colored and hard coat
- substantial energy saving
- suitable for architectural applications

### TECHNICAL DATA

#### Product Data:

Chemical character: nickel acetate preparation, containing anionic and nonionic surfactants

Delivery form: clear, green liquid

Density at 20°C: 1.050-1.090 g/cm<sup>3</sup>

Dilutability: dilutable with water in any proportion

pH: 5.5-6.5

Storage stability: 5 years in closed original containers when stored at 5-30°C