


ANODAL WL SPEC.

ALUMINIUM CHEMICAL

Additive to hot sealing baths as smut reducer. It can be used on its own or in combination with Anodal ASL or Anodal SH-1. Anodal® WL spec can improve the haptic properties ("soft touch") and the scratch resistance of the anodized surfaces significantly.

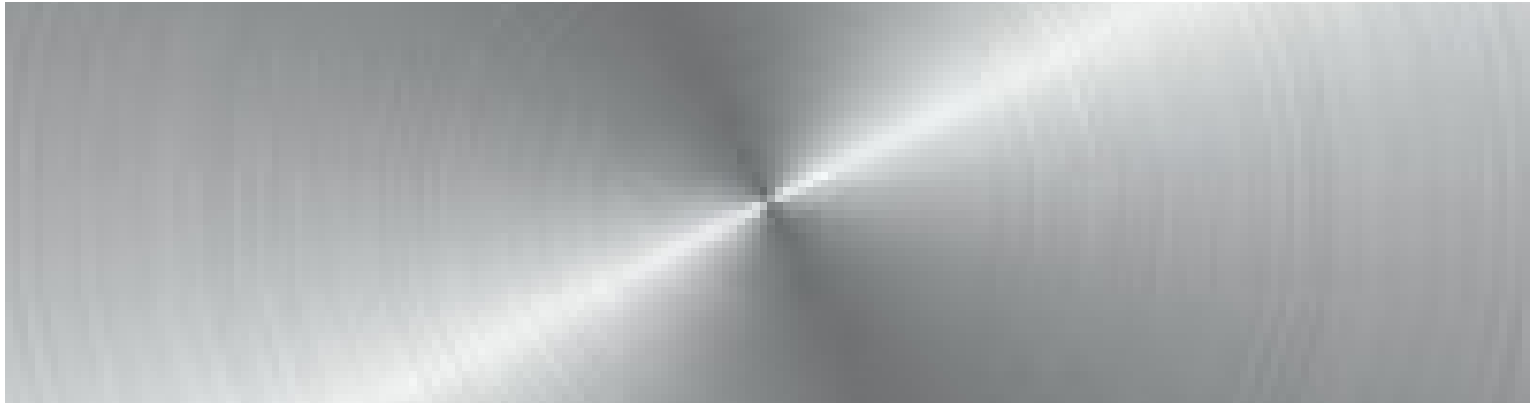

TECHNICAL DATA

Product Data

Chemical Character :	alkyl polyglycol ether
Physical form :	colorless to light yellowish, slightly viscous liquid
Density at 20°C :	1.05 g/cm ³
pH-value 100 g/l by 20°C:	6-8
Boiling point :	~ 100°C
Dilutability:	dilutable with water in any proportion.
Storage stability :	5 years in closed original containers at 5 °C to 30 °C

Applications

- Additive to hot sealing baths as smut reducer
- Improvement of haptic properties
- Improvement of scratch resistance