


## ANODAL® ASL

### ALUMINUM CHEMICAL

Anodal® ASL is a liquid nickel acetate preparation for high grade deposit-free hot sealing (>96°C).

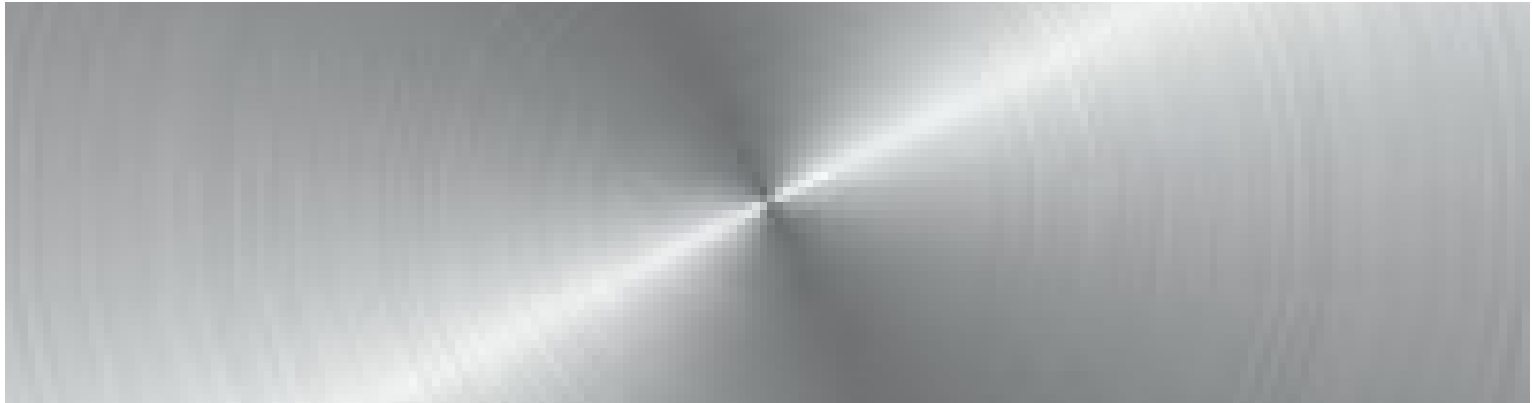

### BENEFITS

- Smut-free sealing at >96°C
- Reduces bleeding of the dyes in the sealing bath
- Enhances the resistance of the aluminum oxide layer

### TECHNICAL DATA

#### Product Data

Delivery form	Green, clear liquid
Density at 20°C	1.11 g/cm <sup>3</sup>
Dilutability	Unlimited in water
Storage stability	5 years in closed original containers when stored at 5-30°C

### Applications

Hot Nickel sealing.

Anodal® ASL is preferably used for films dyed with organic dyes, but also for:

- Undyed films
- Films produced by integral color processes
- Films colored by electrolytic methods with metal salts
- Films inorganically colored by chemical methods